RS CORPORATION

Jyotitech Solar™
Energising Future

TECHNICAL DATA SHEET

JTS 60


60 Wp Monocrystalline
Solar Module

60 Wp
MAXIMUM POWER

17.64 %
MODULE EFFICIENCY

1000 V DC
MAX. SYSTEM VOLTAGE

Class II
SAFETY CLASS

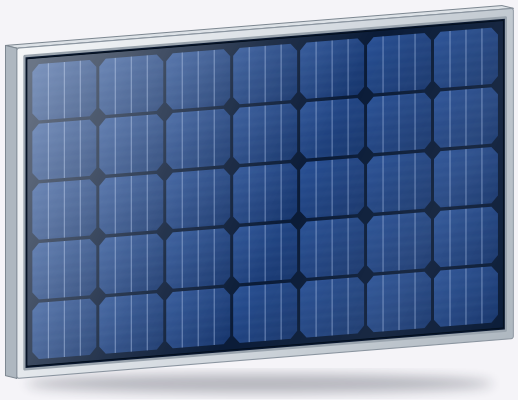

445 × 765 × 30 mm · 4.6 kg · Illustrative image

Electrical Parameters

PARAMETER	SYMBOL	VALUE
Maximum Power	P_{max}	**60 Wp**
Maximum Power Tolerance		**± 3 %**
Maximum Power Voltage	V_{mp}	**18.2 V**
Maximum Power Current	I_{mp}	**3.31 A**
Open Circuit Voltage	V_{oc}	**21.45 V**
Short Circuit Current	I_{sc}	**3.50 A**
Maximum System Voltage		**1000 V DC**
Maximum Series Fuse		**10 A**
Module Efficiency		**17.64 %**
Application Class		**A**
Safety Class		**II**
Cell Type		**Monocrystalline**


RS CORPORATION
'Gayatri' Ganesh Nagar, Near Pethenagar Road, Opposite Lekha Nagar, Nasik-422009
Mo: 7796661999
www.rscorporation.co.in

RS CORPORATION

Jyotitech Solar
Energising Future ™

JTS 60 · 60 WP MONOCRYSTALLINE SOLAR MODULE


Module Drawing

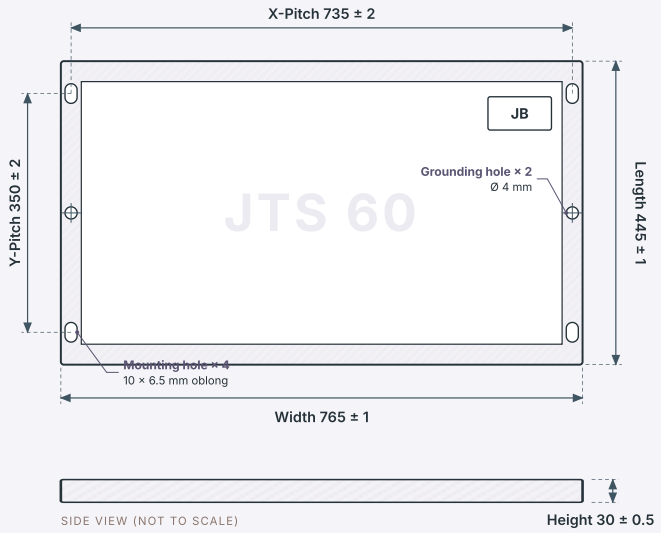

Mechanical Parameters

PARAMETER	VALUE
Length of Module	**445 mm ± 1 mm**
Width of Module	**765 mm ± 1 mm**
Height of Module	**30 mm ± 0.5 mm**
Mounting Hole	**10 × 6.5 mm (Oblong), 4 nos.**
X-Pitch	**735 mm ± 2 mm**
Y-Pitch	**350 mm ± 2 mm**
Grounding Hole	**Ø 4 mm, 2 nos.**
Weight of Module	**4.6 kg**

All dimensions in millimetres. JB = junction box. Mounting and grounding holes are enlarged in the drawing for clarity.

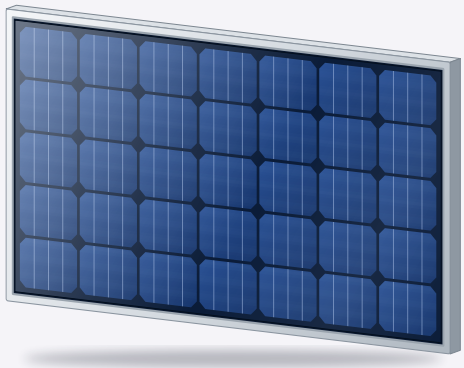

JTS 60 · Illustrative image

RS CORPORATION
'Gayatri' Ganesh Nagar, Near Pethenagar Road, Opposite Lekha Nagar, Nasik-422009
Mo: 7796661999
www.rscorporation.co.in