RS CORPORATION

Jyotitech Solar™
Energising Future

TECHNICAL DATA SHEET

JTS 80


80 Wp Monocrystalline Solar Module

80 Wp
MAXIMUM POWER

19.05 %
MODULE EFFICIENCY

1000 V DC
MAX. SYSTEM VOLTAGE

Class II
SAFETY CLASS

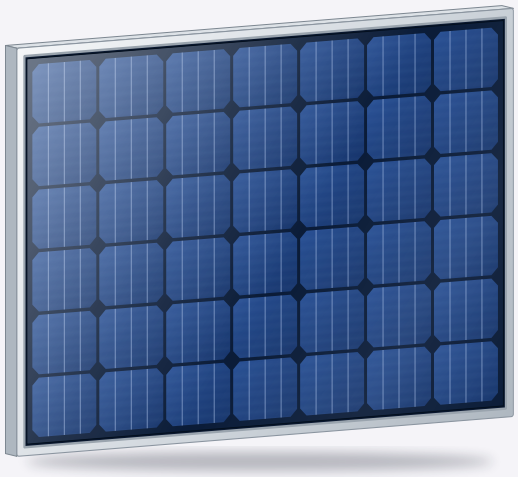

550 × 765 × 30 mm · 4.75 kg · Illustrative image

Electrical Parameters

PARAMETER	SYMBOL	VALUE
Maximum Power	P_{max}	**80 Wp**
Maximum Power Tolerance		**± 2 %**
Maximum Power Voltage	V_{mp}	**18.42 V**
Maximum Power Current	I_{mp}	**4.35 A**
Open Circuit Voltage	V_{oc}	**21.58 V**
Short Circuit Current	I_{sc}	**4.64 A**
Maximum System Voltage		**1000 V DC**
Maximum Series Fuse		**10 A**
Module Efficiency		**19.05 %**
Application Class		**A**
Safety Class		**II**
Cell Type		**Monocrystalline**


RS CORPORATION
'Gayatri' Ganesh Nagar, Near Pethenagar Road, Opposite Lekha Nagar, Nasik-422009
Mo: 7796661999
www.rscorporation.co.in

RS CORPORATION

Jyotitech Solar™
Energising Future

JTS 80 · 80 WP MONOCRYSTALLINE SOLAR MODULE


Module Drawing

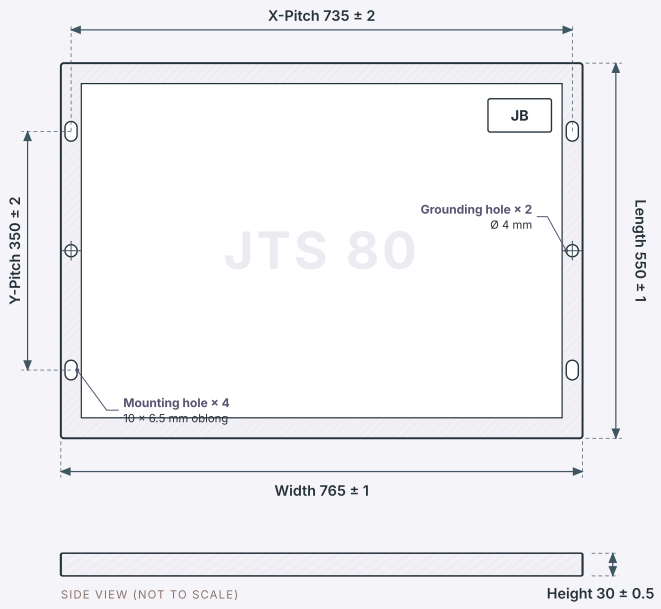

Mechanical Parameters

PARAMETER	VALUE
Length of Module	550 mm ± 1 mm
Width of Module	765 mm ± 1 mm
Height of Module	30 mm ± 0.5 mm
Mounting Hole	10 × 6.5 mm (Oblong), 4 nos.
X-Pitch	735 mm ± 2 mm
Y-Pitch	350 mm ± 2 mm
Grounding Hole	Ø 4 mm, 2 nos.
Weight of Module	4.75 kg

All dimensions in millimetres. JB = junction box. Mounting and grounding holes are enlarged in the drawing for clarity.

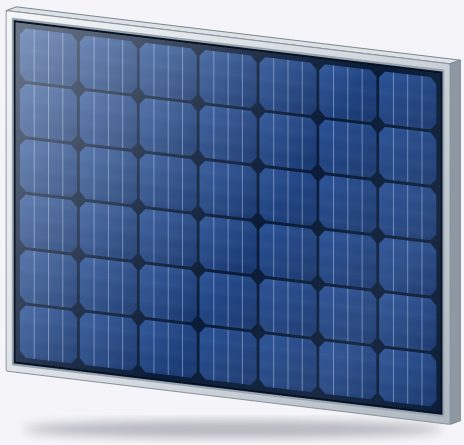

JTS 80 · Illustrative image

RS CORPORATION
'Gayatri' Ganesh Nagar, Near Pethenagar Road, Opposite Lekha Nagar, Nasik-422009
Mo: 7796661999
www.rscorporation.co.in